

EXPOSED GRID TIMBER CEILING TILES




MORTLOCK
TIMBER

1800 894 400
info@mortlock.com.au
www.mortlock.com.au





Mortlock Timber's exposed grid ceiling tiles are prefabricated interior ceiling tiles which you can drop into an exposed T-bar ceiling grid. These timber ceiling tiles are a quick and easy solution to create a feature timber ceiling with acoustic benefits.

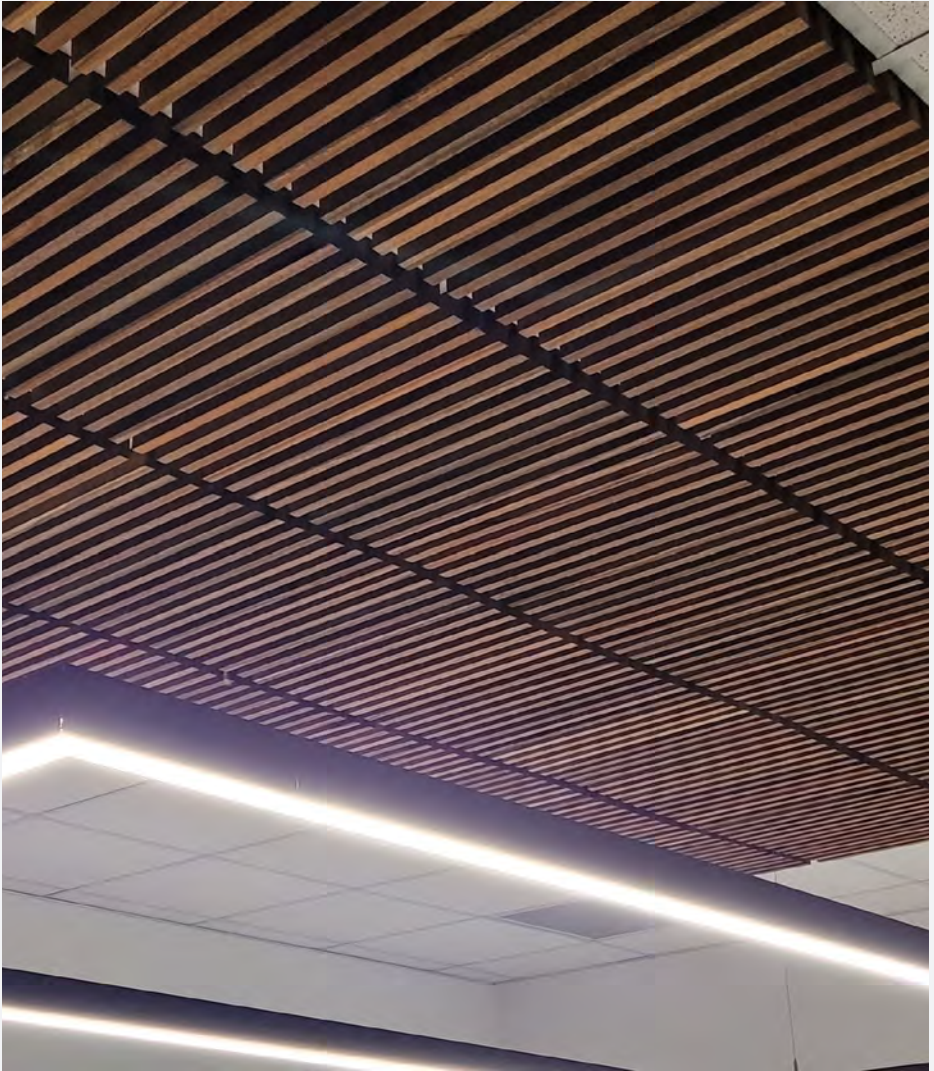





TILE SIZES

595 Tile to suit a 600×600 ceiling grid.

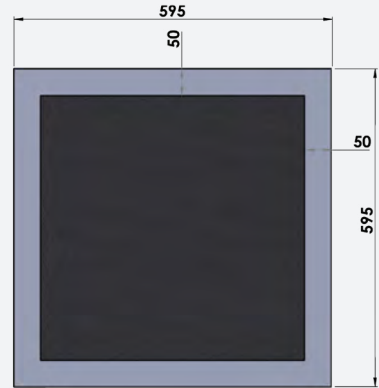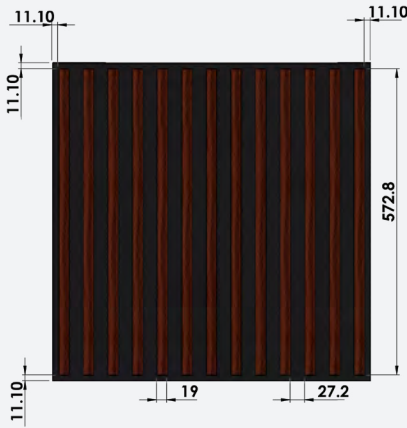


1195 Tile to suit 1200×600 ceiling grid.

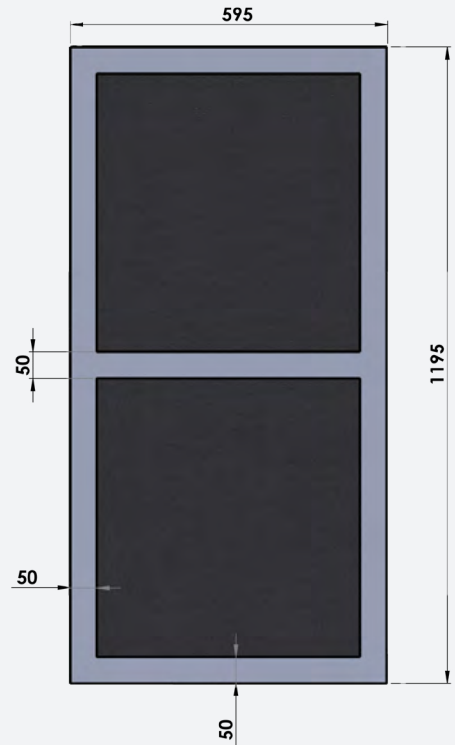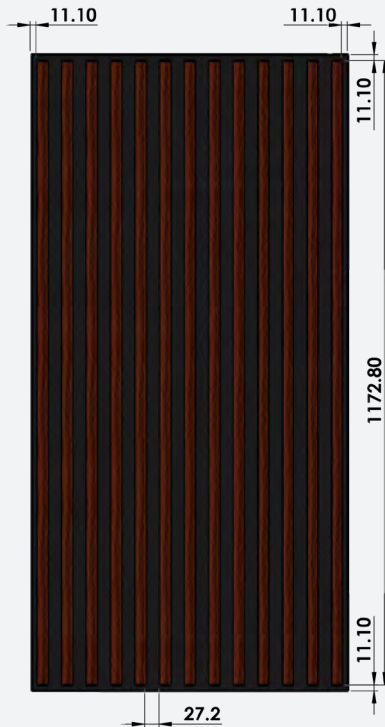




TIMBER BATTEN FORMATS


2040 Battens

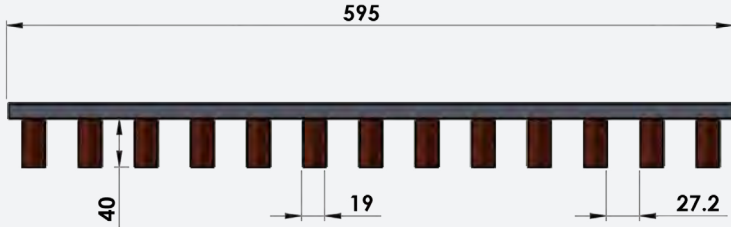

2060 Battens

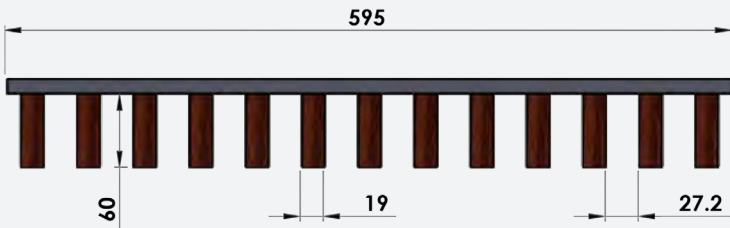

4020 Battens

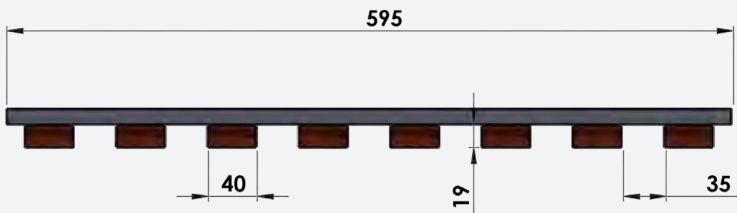

6020 Battens






TIMBER SPECIES




BLACKBUTT	
Pricing	\$\$
Recommended Use	Interior & Exterior



BURNT ASH	
Pricing	\$\$\$
Recommended Use	Interior & Exterior



VIC ASH	
Pricing	\$\$
Recommended Use	Interior



JARRAH	
Pricing	\$
Recommended Use	Interior & Exterior



PACIFIC TEAK	
Pricing	\$\$
Recommended Use	Interior & Exterior



SPOTTED GUM	
Pricing	\$\$
Recommended Use	Interior & Exterior



Ceiling Tile Weights

	595 Tile (Suit 600×600 Grid)				1195 Tile (Suit 1200×600 Grid)			
Batten Format	2040	2060	4020	6020	2040	2060	4020	6020
Timber Species								
Blackbutt	8 kg	11 kg	5 kg	7 kg	14 kg	20 kg	9 kg	14 kg
Burnt Ash	6 kg	8 kg	4 kg	6 kg	12 kg	16 kg	7 kg	11 kg
Jarrah	7 kg	10 kg	4 kg	6 kg	13 kg	19 kg	8 kg	13 kg
Pacific Teak	7 kg	10 kg	4 kg	6 kg	13 kg	19 kg	8 kg	13 kg
Spotted Gum	8 kg	12 kg	5 kg	8 kg	16 kg	22 kg	9 kg	16 kg
Vic Ash	6 kg	8 kg	4 kg	6 kg	12 kg	16 kg	7 kg	11 kg
Weights are approximate and may vary due to timber being a natural product.								

Finishes

NATURAL OIL


This is the standard coating supplied unless others are requested. Clear Cutek CD50 is a penetrating oil which is designed for external use and can also be used for internal applications. To maintain the natural timber colour an additional two coats are to be applied on site as per manufacturer's application and maintenance instructions.

ENVIRO CLEAR

Enviro Clear is a water based LVOC product for interior use only. It is a film forming, non-yellowing coating which is easy to clean and requires minimal maintenance. Timber battens are sanded, and factory coated prior to delivery with Enviro Clear, providing a premium furniture grade finish for interiors.

Fire

Mortlock Timber's exposed grid ceiling tiles meet a group 3 fire rating.

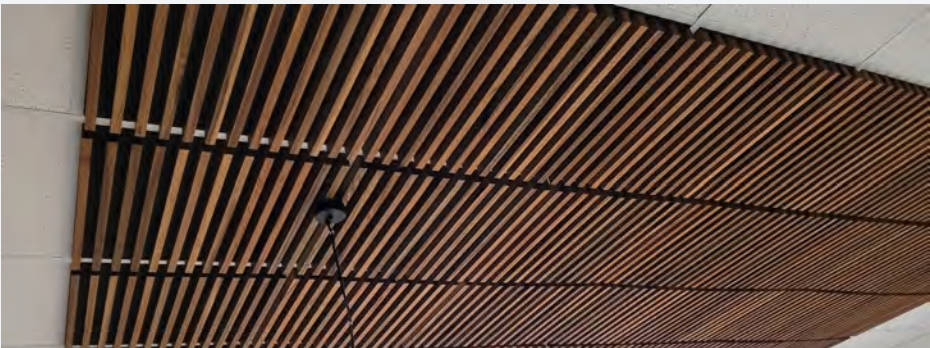

DESIGN & INSTALLATION CONSULTING

Our team can work through detailing and specification requirements to meet specific project requirements. We can assist with budget management without compromising aesthetics and ensure our products perform with an extended life cycle.

SAMPLES

Mortlock Timber Group samples department is stocked with our full range. We use express delivery service and generally deliver samples to your door within 2-3 days. Custom samples and sample boards can take 3-6 weeks depending on requirements.



MORTLOCK
T I M B E R

W: www.mortlock.com.au

T: 1800 894 400

E: info@mortlock.com.au

Distribution: WA | SA | VIC | NSW | QLD | TAS